



## Service Info



# Diamond washer

## for crankshaft vibration damper

Manufacturers: Audi, Volvo, VW

**Model:**

Audi: A6  
 Volvo: 850, S70, S80, V70  
 VW: Crafter, LT, T4

Engine: 2,5 TDI

Part no.: 530 0172 10

530 0172 30  
 530 0482 09  
 530 0482 10  
 530 0482 30  
 530 0483 09  
 530 0483 10  
 530 0483 30  
 530 0484 09  
 530 0484 10  
 530 0484 30  
 530 0484 31

OE number: 074 105 193

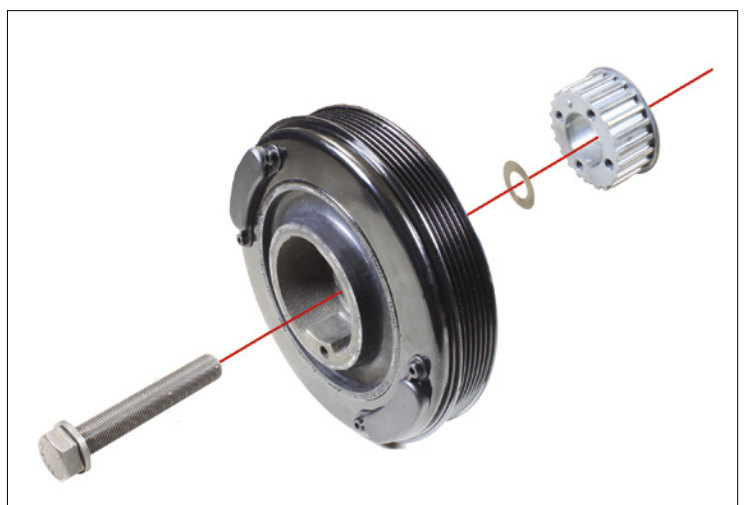


Image 1: crankshaft vibration damper with crankshaft central bolt and diamond washer

The crankshaft vibration damper must be removed when replacing the timing belt on the vehicles listed above.

According to the vehicle manufacturer specifications, the central bolt on the crankshaft and the diamond washer (image 1) must be changed when replacing or disassembling the crankshaft vibration damper.

The central bolt on the crankshaft and the washer are included in the timing belt kits and timing belt sets listed above. The washer provided in these kits and sets has a special coating that works in conjunction with the central screw to prevent the vibration damper from working itself loose.

Observe the specifications of the vehicle manufacturer!

Spare parts and technical information can be found under [www.schaeffler-aftermarket.com](http://www.schaeffler-aftermarket.com) or [www.RepXpert.com](http://www.RepXpert.com).

Phone: +44 (0) 14 32 264 264\*  
 Fax: +44 (0) 14 32 375 760  
[hfd-info@schaeffler.com](mailto:hfd-info@schaeffler.com)  
[www.schaeffler-aftermarket.com](http://www.schaeffler-aftermarket.com)

\* Calls from within the UK 08457 001100

**SCHAEFFLER**  
 AUTOMOTIVE AFTERMARKET

