



Fuel check valves

Revised range (6–12 mm)

Motorservice has revised its range of fuel check valves and now also offers fuel check valves with 10 mm and 12 mm connection diameters.

Fuel check valves are installed in fuel lines. They allow fuel to only flow in one direction and prevent lines running dry, for example.

Order information:

- 7.20235.01.0 6 mm
- 7.20235.02.0 8 mm
- 7.20235.03.0 10 mm
- 7.20235.04.0 12 mm


Product data:

- Length: 60 mm
- Width: 22 mm
- Housing: Aluminium
- Opening pressure: 0.15–0.25 bar (2.2–3.6 psi)
- The non-return valves are suitable for all standardised fuels in motor vehicles.
- An arrow on the housing shows the direction of flow.

Do not use any material combinations which cause corrosion or contact corrosion with aluminium, e.g. salt water or galvanised surfaces.



Fuel check valves 6–12 mm

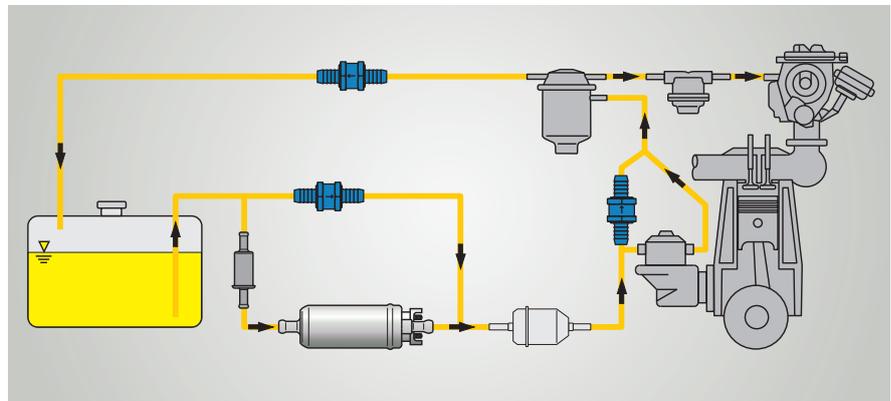

Application example: Carburettor engine with connectible supplementary electrical pump