



## Service Info



# Assembly instructions for DMF with transport fastener

The detent pin must not be removed

Manufacturer: Hyundai  
Mitsubishi  
Nissan  
Renault  
Volvo

Part no.: 415 0142 10  
415 0202 10  
415 0204 10  
415 0224 10  
415 0261 10  
415 0270 10  
415 0383 10  
415 0390 10  
415 0399 10  
415 0400 10  
415 0413 10  
415 0418 10  
415 0419 10  
415 0420 10  
415 0452 10

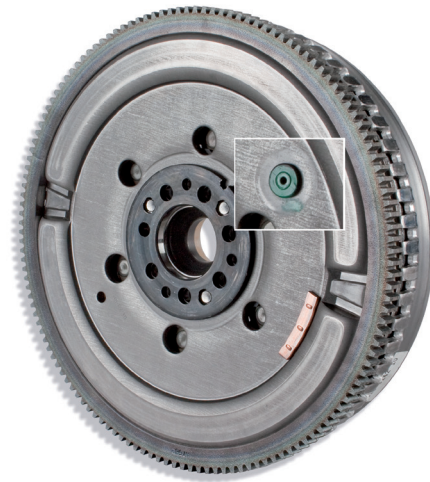


Image 1: The transport fastener is sheared off inside the DMF when the engine is started for the first time

The listed DMFs can be fitted with a transport fastener, which comprises a detent pin (image 1) that prevents the primary and secondary masses from twisting against each other when the DMF is newly installed.

This fastener must not be removed manually, as otherwise individual parts may fall inside the DMF in an uncontrolled manner.

The first time the engine starts, the detent pin is sheared off automatically at a predetermined breaking point. The parts from the plastic fastener remain safely inside the flywheel.

Please observe the vehicle manufacturer specifications!

### You want more? We can help!

Phone: +44 (0) 1432 264 264\*

Fax: +44 (0) 1432 375 760

[hfd-info@schaeffler.com](mailto:hfd-info@schaeffler.com)

[www.schaeffler-aftermarket.co.uk](http://www.schaeffler-aftermarket.co.uk)

\* Calls from within the UK 08457 001100

